

**CAUTION**


TO PROVIDE CONTINUED PROTECTION AGAINST THE RISK OF ELECTRIC SHOCK, CUSTOMER'S POWER SUPPLY MUST BE PROPERLY GROUNDED.

NOTE: GROUNDING SCREW TO HAVE A GREEN COLORED SLOTTED AND/OR HEX HEAD NO SUBSTITUTES. USE #1005

NOTE: THE SURFACE OF THE INSULATED WIRES MARKED (X) TO BE COLORED GREEN, WITH OR WITHOUT ONE OR MORE YELLOW STRIPES.

**WIRING NOTE**

ALL WIRES #14 AWG, TYPE SEW/SF2 MINIMUM UNLESS OTHERWISE NOTED

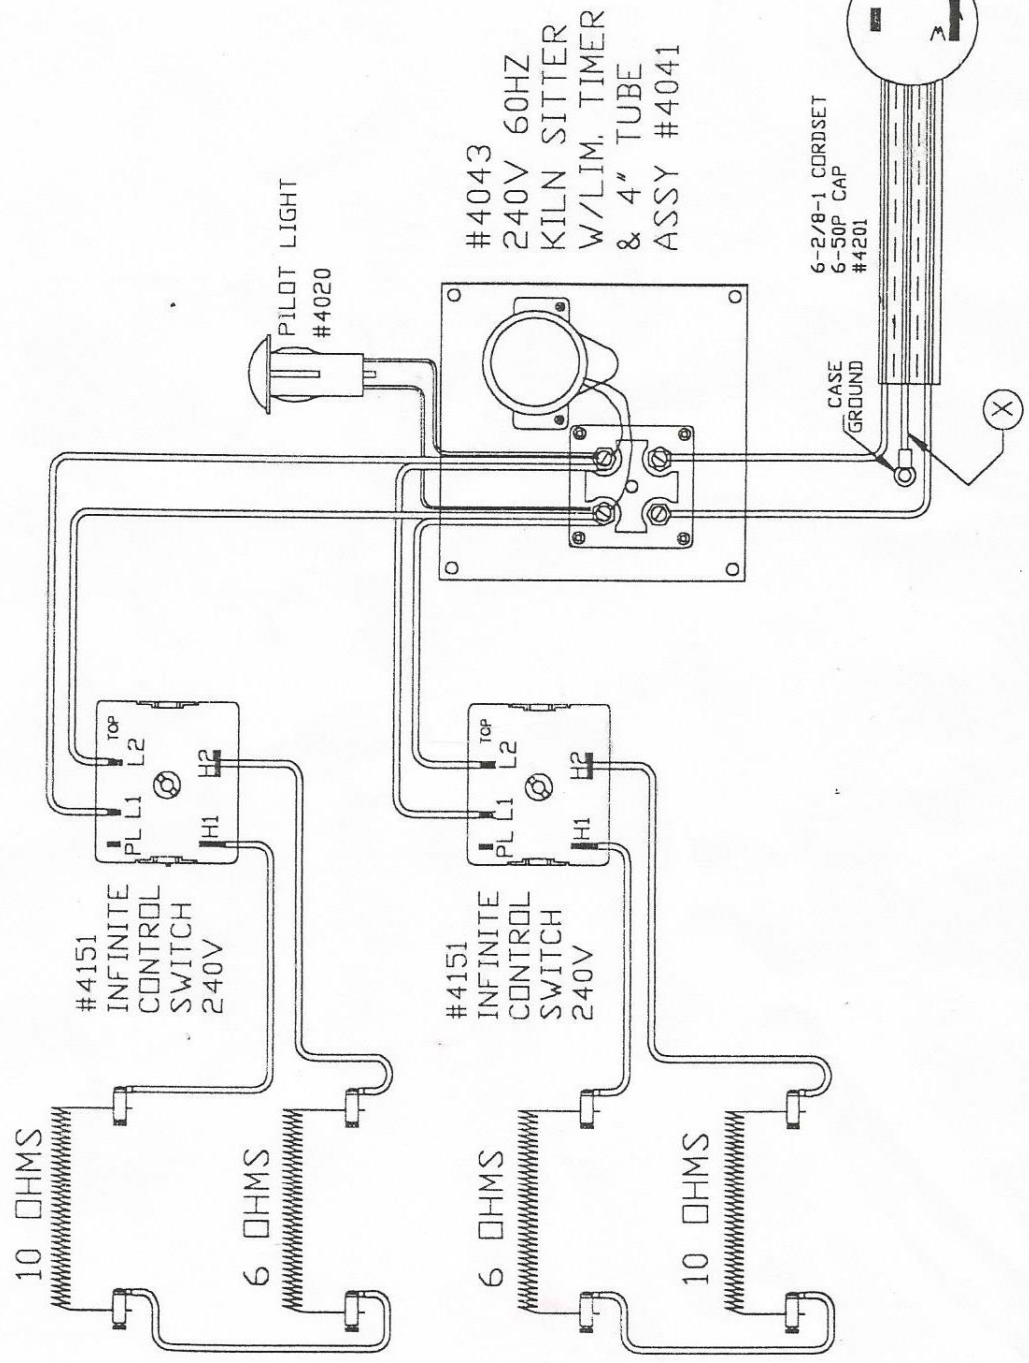

NOTE: PLEASE REFER TO THIS NUMBER WHEN ORDERING PARTS FOR THIS KILN

TO RE-ORDER ELEMENTS, SPECIFY		
DESCRIPTION	QTY	LOC
ELS82TB	2	TOP&BOT
ELS82M	2	MIDDLE

SW BOX #4025

ORIGINAL ISSUE	5-25-95	BY NJM
DATE	4-17-96	NJM
DESCRIPTION	ADDED UL NOTES	

PARAGON INDUSTRIES  
2011 SOUTH TOWN EAST BLVD  
MESQUITE, TEXAS 75149

WIRING DIAGRAM  
S82 - KSLT  
240V 1PH 60HZ 7200W

CATALOG STANDARD  
UL/CUL LISTED

REV	A
FILE	
IC	S82
PART NO	
By	Norm Montesino

2300° F